




IPML cd.

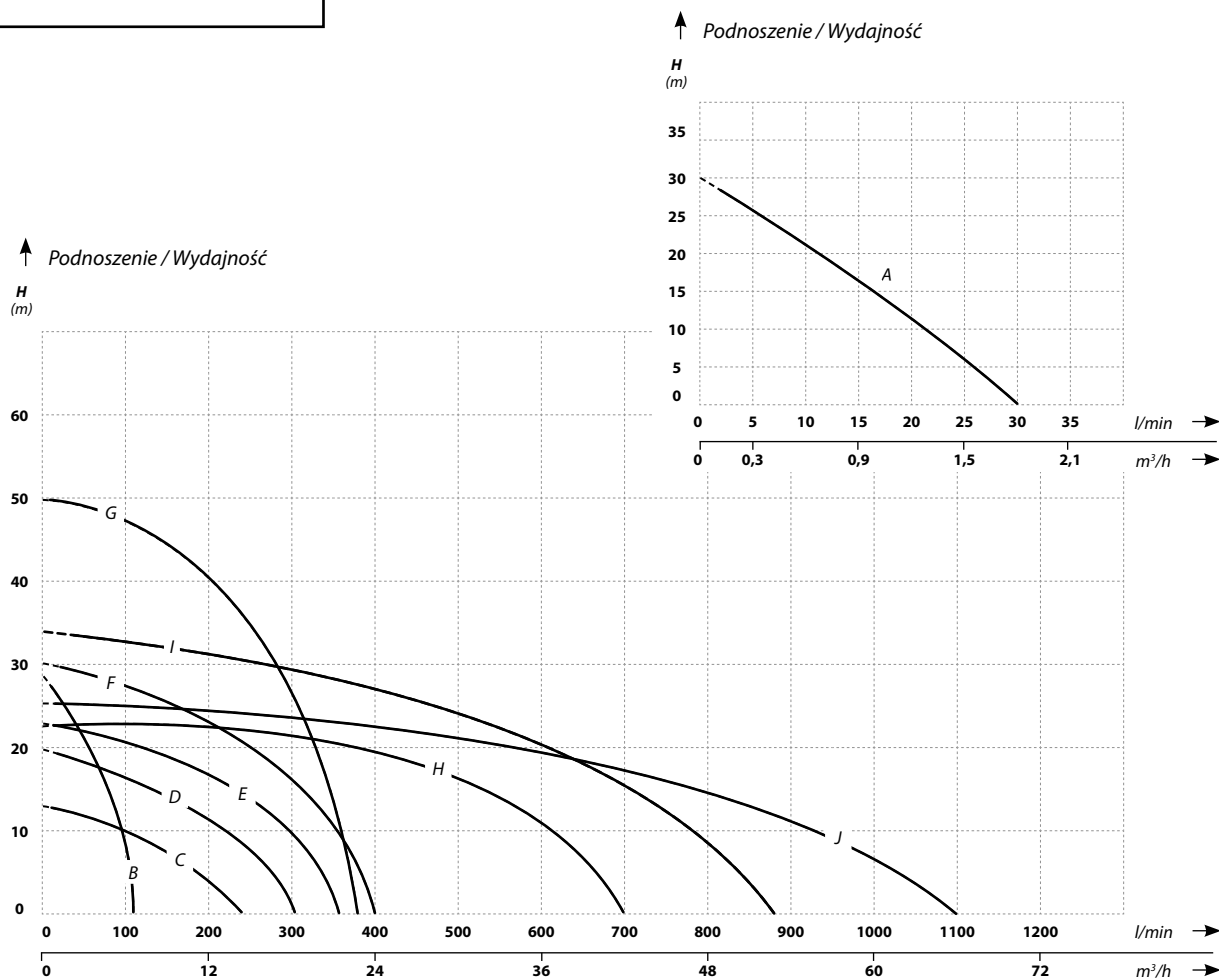

Model	Nr wykresu	Podnoszenie (m)	Wydajność (l/min)	Moc silnika (W)	Zasilanie (V)	Króćce (cale / DN)	Rozstaw króćców (mm)	Maks. temperatura medium (°C)	Waga (kg)
IPML 25/125	A	30	30	125	230	½	-	80 (100*)	8
IPML 25/750	B	28	106	750	230	1	280	100	16
IPML 50/750	C	13	240	750	230	DN50	280	100	20
IPML 50/1100	D	20	300	1100	230	DN50	280	80 (100*)	23,2
IPML 50/1500	E	22	350	1500	400	DN50	312	80 (100*)	34,5
IPML 50/2200	F	30	400	2200	400	DN50	312	80 (100*)	29
IPML 50/5500	G	55	380	5500	400	DN50	343	80 (100*)	65
IPML 65/3000	H	22	700	3000	400	DN65	343	80 (100*)	66
IPML 65/4000	I	34	880	4000	400	DN65	343	80 (100*)	70,5
IPML 80/5500	J	25	1100	5500	400	DN80	343	80 (100*)	76

* do 30 min