

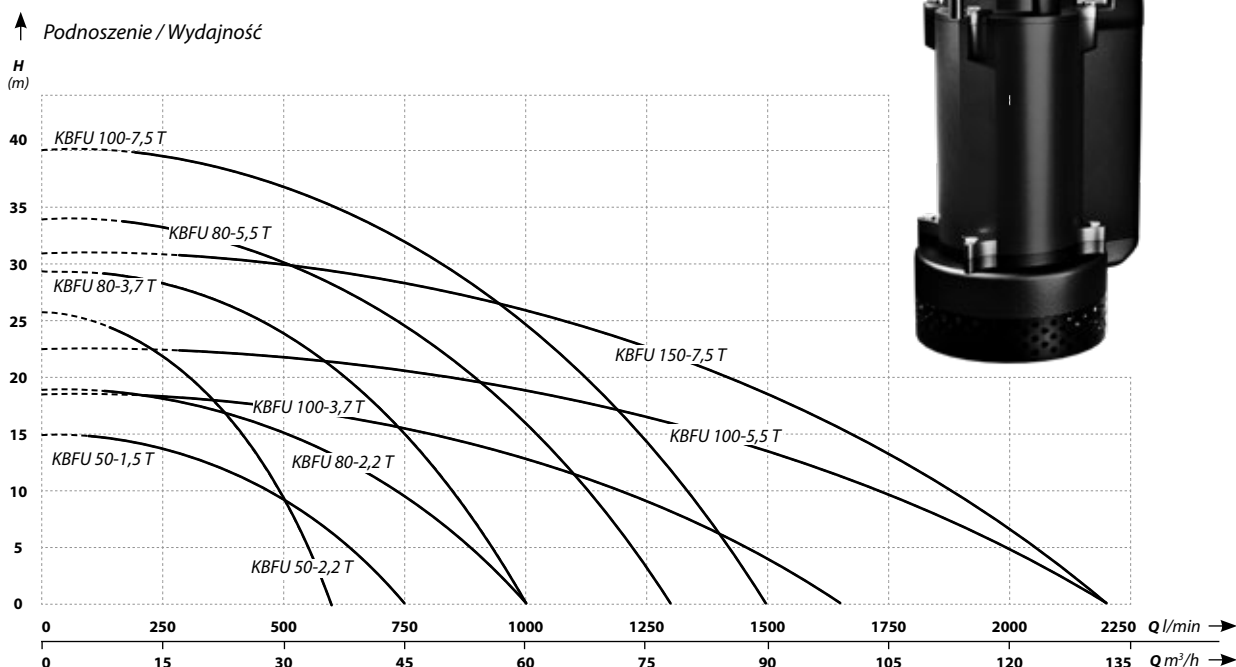


KBFU 230 V | 400 V cd.



Model	Wymiary (mm)						
	Ød	A	A1	B	D	H	W1
KBFU 50-1,5 T	50	235	173	535	216	505	120
KBFU 50-2,2 T	50	235	173	535	216	505	120
KBFU 80-2,2 T	80	235	173	535	216	505	120
KBFU 80-3,7 T	80	283	208	628	252	629	150
KBFU 80-5,5 T	80	329	240	671	300	590	150
KBFU 100-3,7 T	100	283	208	642	252	629	150
KBFU 100-5,5 T	100	329	240	686	300	590	150
KBFU 100-7,5 T	100	330	240	764	314	676	190
KBFU 150-7,5 T	150	330	240	790	314	676	190



Model	Podnoszenie (m)	Wydajność (l/min)	Moc silnika (W)	Zasilanie (V)	Pobór prądu (A)	Króciec (cale)	Waga (kg)
KBFU 50-1,5 T	15	750	1500	400	3,5	3	37
KBFU 50-2,2 T	26	600	2200	400	5,0	2	39
KBFU 80-2,2 T	19	1000	2200	400	5,0	3	39
KBFU 80-3,7 T	29	1000	3700	400	7,7	3	63
KBFU 80-5,5 T	34	1300	5500	400	11,4	3	79
KBFU 100-3,7 T	18,5	1650	3700	400	7,7	4	63
KBFU 100-5,5 T	23	2200	5500	400	11,4	4	78,5
KBFU 100-7,5 T	40	1500	7500	400	15	4	106
KBFU 150-7,5 T	31	2200	7500	400	15	6	108