
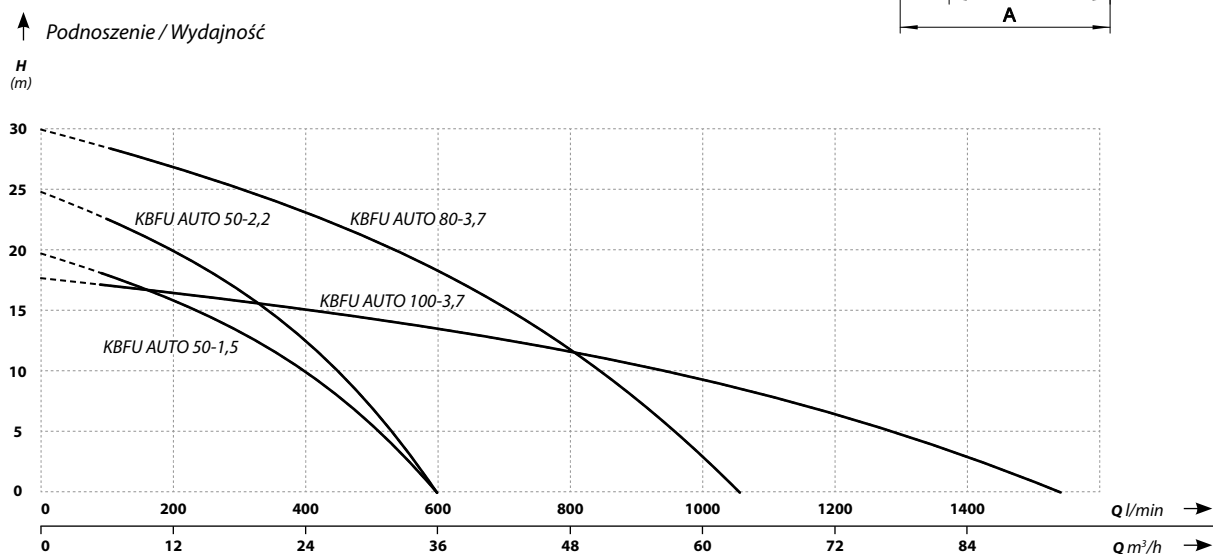



KBFU AUTO cd.

Model	Wymiary (mm)						
	Ød	A	A1	B	D	H	W1
KBFU AUTO 50-1,5	50	235	173	629	216	594	135
KBFU AUTO 50-2,2	50	235	173	629	216	594	135
KBFU AUTO 80-3,7	80	283	208	714	252	720	165
KBFU AUTO 100-3,7	100	283	208	739	252	720	165

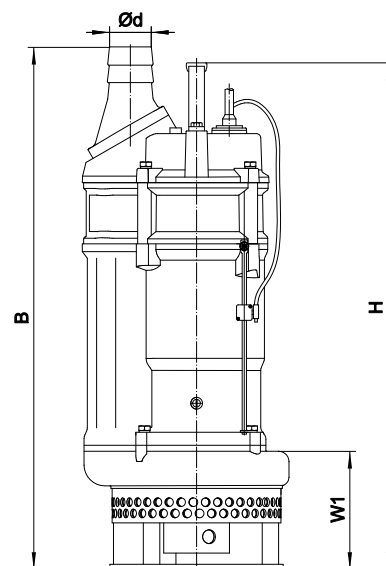

Model	Podnoszenie (m)	Wydajność (l/min)	Moc silnika (W)	Zasilanie (V)	Pobór prądu (A)	Przełot przez wimik (mm)	Króciec (cale)	Waga (kg)
KBFU AUTO 50-1,5	20	600	1500	400	3,5	10	2	43
KBFU AUTO 50-2,2	25	600	2200	400	5,1	10	2	46
KBFU AUTO 80-3,7	30	1050	3700	400	8,0	10	3	46
KBFU AUTO 100-3,7	18	1550	3700	400	8,0	10	4	46